
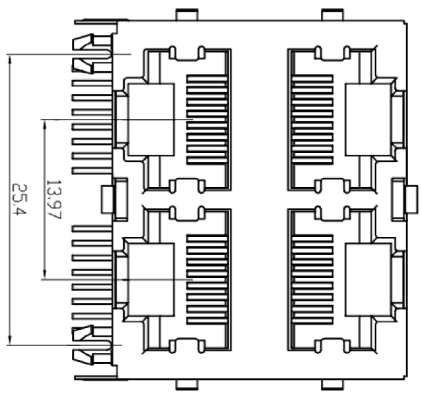
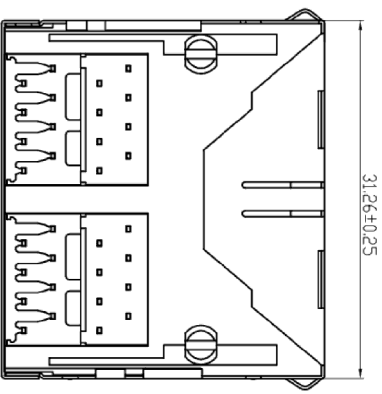


PC Board Layout

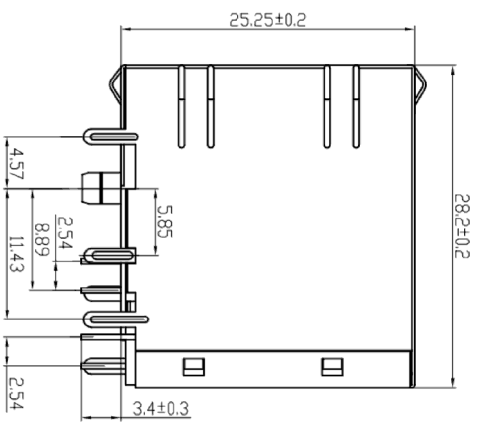

REV	ECN NO	DESCRIPTION	DATE
A	JIONS-RJ45-0001		2013/02/17

X: ±0.30	APPD: Mr.wu	TITLE:
X: ±0.20	CHKD: Mr.wu	2*2 RJ45 带弹片不带灯
XX: ±0.10	DR: Gus chong	PART NO: JIONS-RJ45-0001
.XXX: ±0.05	UNITS: mm	DWG NO: www.jions.com.cn
X: ±2°	SCALE: 1:1	客户图
X: ±1°		SHEET: 10/1

- NOTES:
- ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 30 MILLIOMHMAX
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 NDC.
 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.
- MECHANICAL:
1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
 2. CONTACT MATERIAL : DIAMETER: 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 3. SHIELD : 0.20 0.25MM THICKNESS BRASS WITH TIN PLATED.
 4. MATING/DUMATING FORCE : 2.2KG.F MAX.
 5. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
- ENVIRONMENTAL:
1. STORAGE : -10°C ~+40°C RELATIVE HUMIDITY<70%
 2. OPERATION : -40°C ~+70°C

