
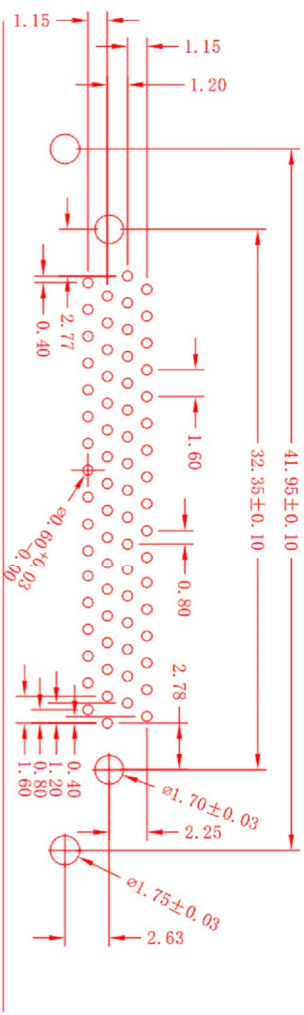


- MATERIALS: (RoHS Compliant)
- Housing: Plastic Thermoplastic PA66 UL94V
- Termination Cover: Plastic Thermoplastic PBT UL94V-
- Contacts: Phosphor Bronze Gold Selective P
- Shell: SPCC Nickel Plated Over Copper
- Boardlock: Brass, Tin Plated Over Copper
- Screws: Steel, Nickel Plated Over Copper

○ ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 250V AC
 Insulation Resistance: >500M Ω /Min
 Contact Resistance: 35m Ω /Max
 Operation Temperature: -55 $^{\circ}$ C ~ +85 $^{\circ}$ C

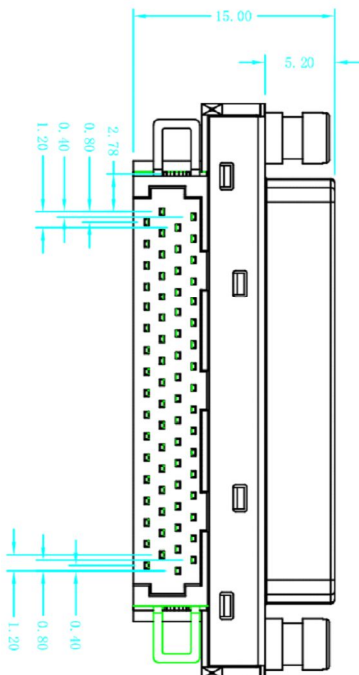

北京玖思启明电子科技有限公司

A	JIONSCHI001	DESCRIPTION	DATE
REV	ECN NO		
	1		2014/06/12

X	±0.30	APPD:	Mr.wu	TITLE:	
X	±0.20	CHKD:	Mr.wu	SC51 68PIN DIP式	
XX	±0.10	DR:	Gus chong	PART No:	JIONS-0011
XXX	±0.05	UNITS:	mm	DWG NO:	WWW.JIONS.COM.CN
X	±2°	SCALE:	1:1	客户图	SHEET:10F
X	±1°	REV:			