
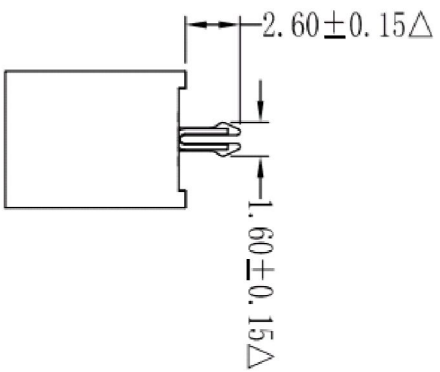


**SPECIFICATION**  
 Material: Housing: LCP UL 94V-0  
 Terminal: Brass C2680  
 Board Lock: Brass C2680

**Mechanical:** Insertion Force: 45N max  
 Withdrawal Force: 10N min  
 Durability: 500 cycles

**ELECTRICAL:**  
 RATED CURRENT: 1.5 Amp  
 INSULATION RESISTANCE: 1000 MΩ Min  
 CONTACT RESISTANCE: 30 MΩ Max  
 DIELECTRIC WITHSTANDING VOLTAGE  
 AC 500V FOR 1 MINUTE  
 OPERATING TEMPERATURE: -40°C ~ +85°C  
 Standard: Gold Flash all over

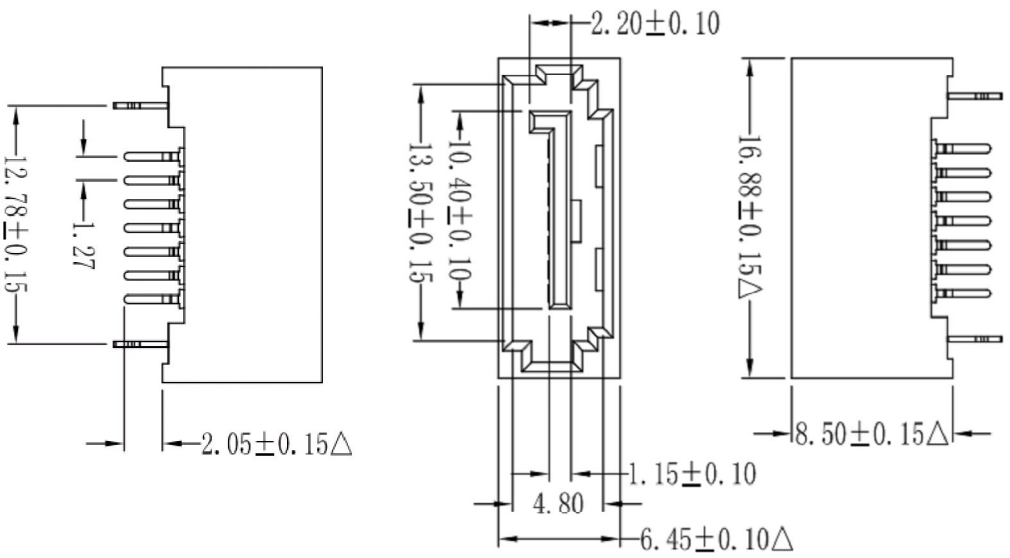

REV	JIONS-0080	www.jions.com.cn	2014/01/12
ECN NO		DESCRIPTION	DATE
1			

X. ±0.30	APPD: Mr.wu	TITLE: SATA 7PIN 180° 全包不开
X ±0.20	CHKD: Mr.wu	窗 A Type
XX ±0.10	DR: Gus chong	PART NO: JIONS-0080
.XXX±0.05	UNITS: mm	SCALE: 1:1
X ±0.05	SCALE: 1:1	北京致恩启明电子科技有限公司
X ±1°	SHEET: 10/1	REV: