
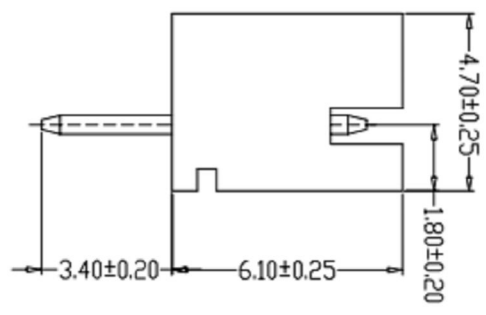


REV.	DESCRIPTION	DATE
A	RELEASE	Jun 02, 2015



SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 10mΩ Max
- 5、Insulation Resistance: 1000mΩ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

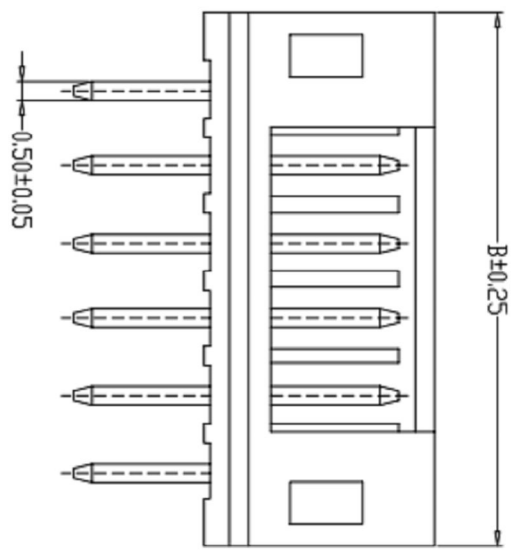


TYPE 1

TYPE 2

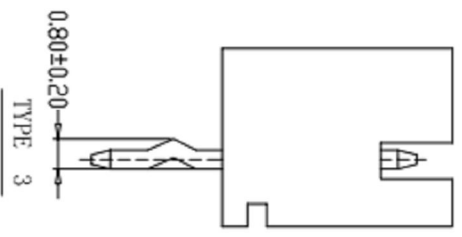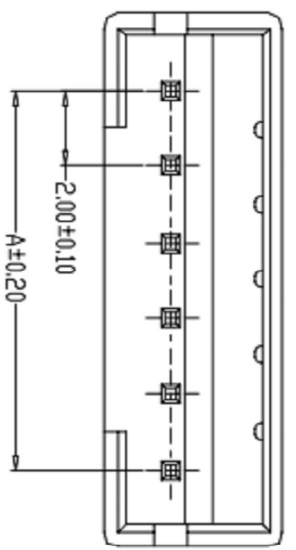

PCB LAYOUT

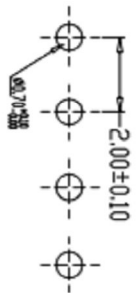

P数	尺寸 (mm)	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0
16	30.0	34.0

DESCRIPTION OF PLATING ON TERMINALS

NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		

TOLERANCE  
.0=±0.25  
.00=±0.15  
.000=±0.05  
ANG.=±3°

UNITS : mm

SCALE NONE SIZE A7 SHEET 1 OF 1 REV. A

DRAWER *Sheny* CHECK *Sheny* APP'D *Sheny* NAME PH 180° 2.0mm  
PRODUCT SPEC. DRAW NO. JIONS-0186

www.jions.com.cn

